30M IR BULLET VARI-FOCAL CAMERA

I3-390HD(2.8-12)

* Functionality is subject to camera model

- 1/3" Panasonic CMOS sensor
- Output: Digital - HD-SDI 1920x1080p / 30fps
  Service Analog- 700TV
- Mega-Pixel 2.8-12mm Vari-focal lens
- True Day&Night- ICR
- Min.Illumination: 0 Lux(IR LED On)
- IR Range-30m
- DSS(Digital Slow Shutter)
- DNR (Digital Noise Reduction, 2D+3D)
- True WDR (at 15fps)
- D-WDR/BLC/HLC
- Privacy Mask
- Intelligent Motion Detection
- Smart IR
- Image Mirror/Digital Zoom
- RS-485
- DC12V
- IP66

Specifications

MODEL	I3-390HD(2.8-12)
Image Sensor	1/3" Panasonic CMOS
Active Pixels	1944(H) x 1092(V)=2,122,848 (pixel)
Lens	2.8~12mm Varifocal Lens (2.1MP)
Scanning System	Progressive
Resolution	Digital ; 1920x1080p(1080p/30fps), 1280x720p(720p/60fps) Analog:700 TVL
Min. Illumination	0.0Lux(IR LED ON) 27 pieces IR LED
IR Range	30M
Video Output	Digital: HD-SDI, Analog:NTSC,PAL(without WDR)
True D&N	ICR(IR Cut Removable)
S/N RATIO	More Than 50dB(AGC off)
Sharpness	0 ~ 10 steps
Mirror/Flip	Off / Rotate / Mirror / Flip
D-Zoom	x1 ~ x8
HLC (Eclipse)	Off / On
Brightness	0 ~ 20 steps
Lens	DC / Manual
Shut Speed	Auto / Manual (1/30(1/25) ~ 1/60000)
DSS(Sense-Up)	Off / x2 ~ x8

AGC	0~20 steps
WDR/BLC	Off/ HLC/ BLC/ WDR (WDR at 15 fps)
Day & Night	Auto / Day / Night / Ext
Smart IR	Off / On
White BAL	Auto / Push / Manual
3D DNR	Off / Low / Middle / High
Privacy	Off / On (32 points)
Motion	Off / On
Lens shading	Off / On
System	NTSC / PAL
HD Format	1080P / 720P
COMM	ID (1 ~ 255), B.Rate(2400-9600), Prot.(Pelco P/D)
OSD text	Available
Power	DC 12V 450 mA(Max)
Operating Temperature	-10℃ ~ +50℃ (Humidity : 0%RH ~ 80%RH)
Storeage Temperature	-20℃ ~ +60℃ (Humidity : 0%RH ~ 90%RH)
Dimension	320(L) x 93.8(W) x 81(H) mm
Weight	860g
IP Rating	IP66

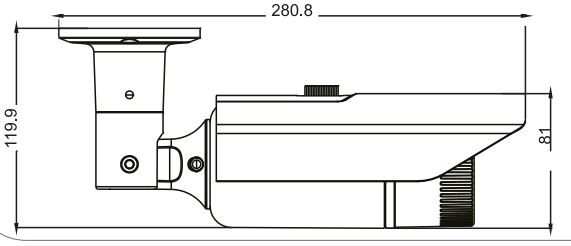

OSD Controller